


Part No. LLL-ORANGE

5 mm

Round

Type : LED Lamps

Package Dimension :

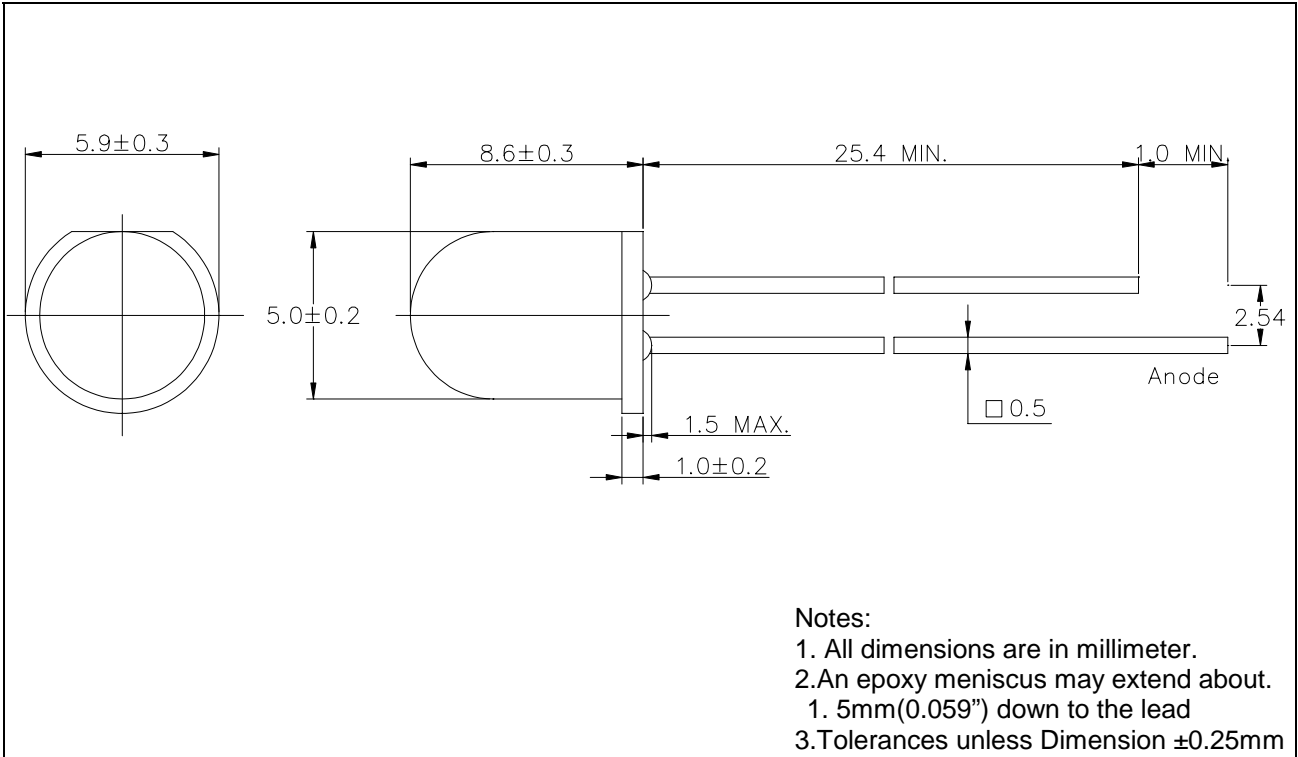

■ Features :

- Choice of various viewing angles.
- Available on Tape and Reel.
- Reliable and robust.

■ Descriptions :

- The series is specially designed for application requiring higher brightness.
- The LED lamps are available with different color, intensities, epoxy colors etc.

■ Applications :

- TV set
- Monitor
- Telephone

Part No. LLL-ORANGE

5 mm

Round

Type : LED Lamps

PART NO.	Chip		Lens Color
	Material	Emitted Color	
AL-513UOC	AlGaInP	Super Amber	Water Clear

■ Absolute Maximum Ratings at Ta=25

Parameter	Symbol	Rating	Unit
Continuous Forward Current	I _F	50	mA
Operating Temperature	T _{opr}	-40 to +85	
Storage Temperature	T _{stg}	-40 to +85	
Soldering Temperature	T _{sol}	260 ±5	
Electrostatic Discharge	ESD	1000	V
Power Dissipation	P _D	130	mW
Peak Forward Current (Duty 1/10@1KHz)	I _F (Peak)	150	mA
Reverse Voltage	V _R	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I _V	3000	4000	/	mcd	I _F =20mA
Viewing Angle	2θ _{1/2}	/	15	/	deg	I _F =20mA
Peak Wavelength	p	/	605	/	nm	I _F =20mA
Dominant Wavelength	d	/	610	/	nm	I _F =20mA
Spectrum Radiation Bandwidth		/	20	/	nm	I _F =20mA
Forward Voltage	V _F	/	2.4	3.0	V	I _F =20mA
Reverse Current	I _R	/	/	10	μA	V _R =5V

Part No. LLL-ORANGE

5 mm

Round

Type : LED Lamps

■ Reliability test items and conditions :

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260 ± 5	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85 30min ┆ 5min L : -55 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100 5min ┆ 10set L : -10 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25 I _F =20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 HRS	76 PCS	0/1



Part No. LLL-ORANGE

5 mm

Round

Type : LED Lamps

◆ TYPICAL ELECTRICAL-OPTICAL CHARACTERISTICS CURVES

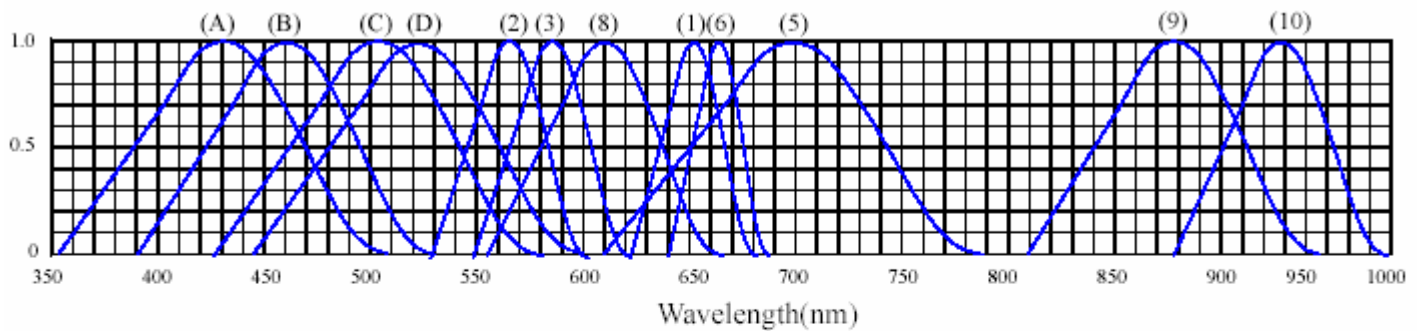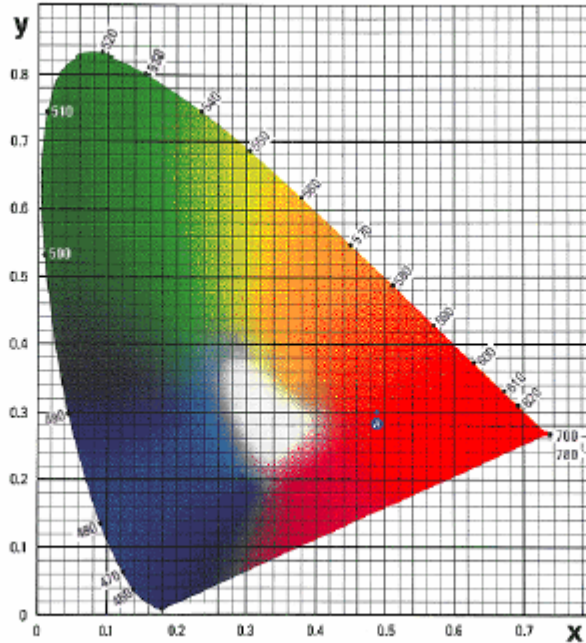

RELATIVE INTENSITY VS. WAVELENGTH(λ_p)

- | | |
|-----------------------------------------|----------------------------------|
| (1) GaAsP/GaAs 655nm/Red | (9)- GaAlAs 880nm |
| (2) GaP 568nm/ Yellow Green | (10)-GaAs/GaAs&GaAlAs/GaAs 940nm |
| (3) GaAsP/GaP 585nm/Yellow | (A)- GaN 430nm/Blue |
| (4) GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B)- InGaN 470nm/Blue |
| (5) GaP 700nm/Bright Red | (C)- InGaN 502nm/Ultra Green |
| (6) GaAlAs/GaAs 660nm/Super Red | (D)- InGaN 523nm/Ultra Green |
| (8) GaAsP/GaP 610nm/Super Red | |

Part No. LLL-ORANGE


5 mm

Round


Type : LED Lamps

◆ CHARACTERISTICS DIAGRAMS

FORWARD CURRENT VS. FORWARD VOLTAGE

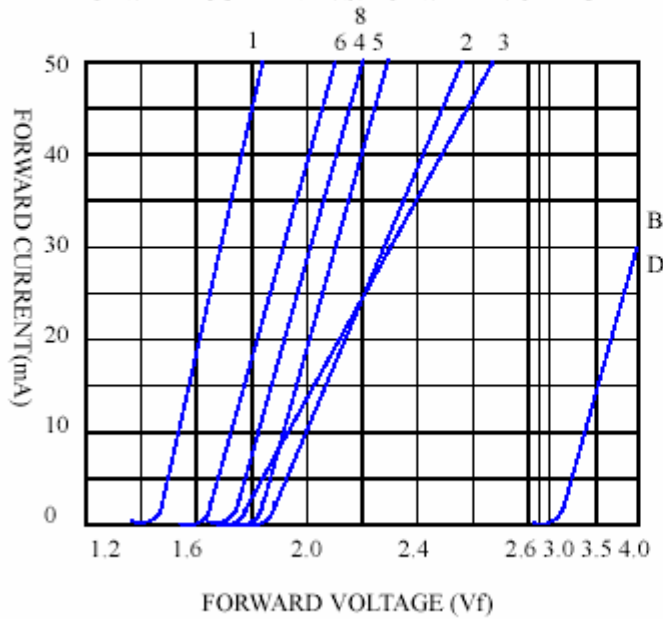

RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

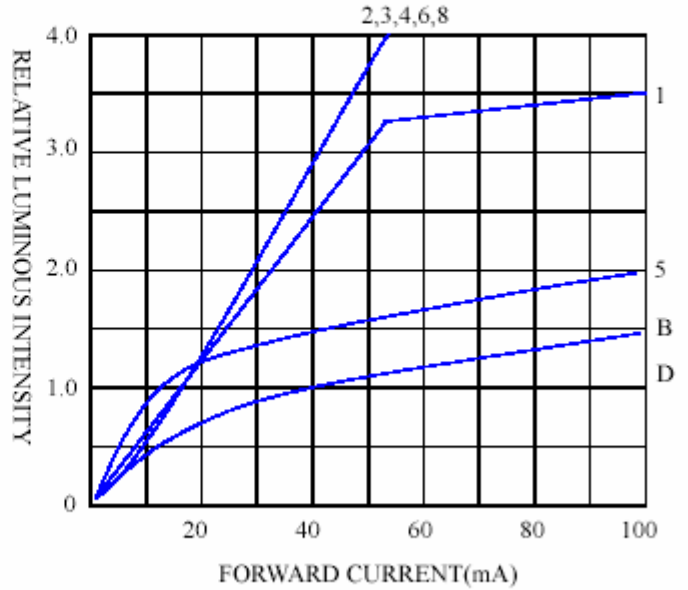

FORWARD CURRENT VS. AMBIENT TEMPERATURE

